

## Overview

RezCast offers a complete line of anti-slip step covers and safety flooring materials. Our safety flooring products are resin-based, fiber reinforced composites with aggregate surfaces. These products are ideal for industrial, commercial and residential applications where an attractive, long-lasting anti-slip solution is desired.

The resin-based construction offers advantages over competitor's products made from metal, vinyl or rubber. Unlike the metal offerings, RezCast products can be easily cut and shaped to fit using common tools. While most vinyl and rubber products are highly susceptible to oxidation, sunlight and ozone damage, RezCast safety flooring is extremely durable. The resin-based materials are highly resistant to wear as well as corrosion and chemical exposure.

RezCast Safety Flooring products offer the optimum in anti-slip protection at value prices. Our step covers and flooring materials outperform and outlast other products on the market today. We back this up with a ten-year limited warranty\*.

In addition to offering superior anti-slip protection and long life, RezCast products are visually attractive. They are available in a wide variety of colors, textures, and physical dimensions. Our ADA line is fully compliant to the current ADA/CALDAG specifications for the visually impaired. For those special applications, RezCast products can be produced in custom colors and configurations to meet virtually any requirement.

**RezCast**<sup>®</sup>  
Safety Flooring

Distributed By:



Sigma Metals Inc.  
3575 Chelton Loop South  
Colorado Springs, CO 80909


Phone: 719-574-2280  
Fax: 719-574-1925

Dan@sigmametals.com

**RezCast**<sup>®</sup>  
Safety Flooring

5757 E. Fountain Way Suite 101 Fresno, CA 93727  
tel: 559/292/4342 fax: 559/292/3521

**RezCast**<sup>®</sup>  
Safety Flooring

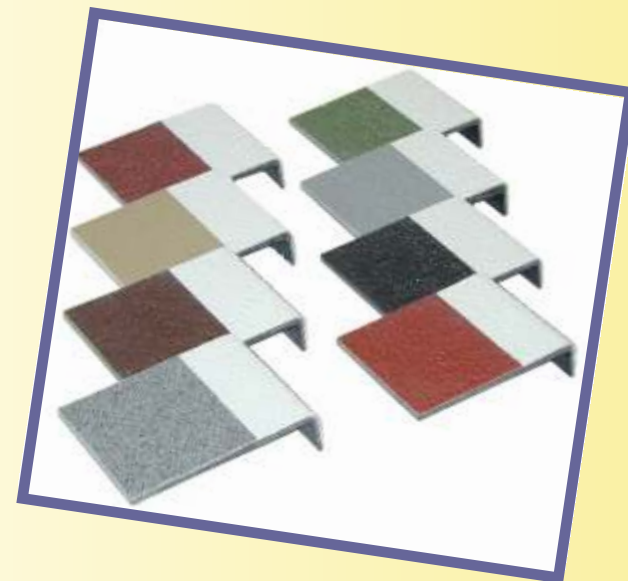

**Anti-Slip**  
Flooring Solutions



## Technical Specifications

### DESCRIPTION

RezCast Safety Flooring products are made of highly durable, semi-rigid, fiber reinforced resin-based composites, with anti-slip aggregate surfacing. These materials are cast into a variety of sizes and shapes for use as stair treads, landing covers and anti-slip mats.

### DURABILITY

RezCast anti-slip stair tread covers and floor mats are resistant to degradation and corrosion caused by weather, chemicals or UV radiation. They will not rust or rot. RezCast Safety Flooring products come with a ten-year limited performance warranty\*.

### ANTI-SLIP PROPERTIES

RezCast Safety Flooring products are highly slip resistant. When tested using the ASTM C-1028 methodology, our medium texture aggregate surface achieved a dry coefficient of friction, (C.O.F.), rating of .94. The wet C.O.F. rating was even better, a remarkable 1.07. RezCast Safety Flooring products exceed all



### ADA Step Cover

.250 mil or .187mil nominal thickness with 1 ½" nose and safety stripe in a contrasting color. Available in fine, medium or coarse texture in standard or premium colors. Standard tread lengths, 2.1/2', 3', 6', 9'. Maximum tread length 10'.



### Industrial Step Cover

.250 mil nominal thickness with 2" nose and a safety stripe in a contrasting color. Available in fine, medium or coarse texture in standard or premium colors. Standard tread lengths, 2 ½', 3', 6', 9'.



### Commercial Step Cover

.187 mil nominal thickness with 1 ½" nose and a safety stripe in a contrasting color. Available in fine, medium or coarse texture in standard or premium colors. Standard tread lengths, 2 ½', 3', 6', 9'. Maximum tread length 10'.



### Value-Line Step Cover

.125 mil nominal thickness with 1 ½" nose. Available in fine, medium or coarse texture in standard colors only. Standard tread lengths, 2 ½', 3', 6', 9'. Maximum tread length 10'.



### Anti-slip Floor Mats

.125 mil or .187 mil nominal thickness. Available in fine, medium or coarse texture in standard or premium colors. Standard material widths range from 2' to 6.5'. Maximum length is 16'.

### Features

Complies to ADA/CALDAG standards (1133B.4.4, 1133B.4.5) for the visually impaired  
C.O.F., (wet), 1.07, (medium texture)  
10-year limited warranty

### Features

Flexural Strength 31,800 psi or heavy traffic demands  
Highly resistant to chemical exposure  
C.O.F., (wet), 1.07, (medium texture)

### Features

Available in many colors and textures  
Meets UL 900 Class 1 flammability standard  
C.O.F., (wet), 1.07, (medium texture)  
10-year limited warranty

### Features

Value priced  
Easily cut to fit using common tools  
C.O.F., (wet), 1.07, (medium texture)  
5-year limited warranty

### Features

Durable, prefab composite with anti-slip aggregate surface  
Corrosion & UV resistant  
C.O.F., (wet), 1.07, (medium texture)

Standard colors are Brown, Black, Gray, White, Tan, Aqua Blue, Green, Terra Cotta, Desert and Tile Red. Premium and custom colors are available. Safety nosing is available in Yellow, Blue, Red, Black and White.

RezCast products are easily installed. For best results, RezCast Safety Flooring should be installed using a high quality adhesive and mechanical fasteners. Adhesive and fasteners are available from RezCast and its authorized distributors.

In addition to the products listed above, RezCast also offers custom-made reducer covers for the top of staircases as well as a complete line of structural anti-slip stair treads. Custom orders are welcome. For more information, please contact RezCast or your local distributor.